



# STEP TP-601A

Fully Automatic Strapping Machine  
Equip with Roller-driven Table for Wide Straps


## Fully Automatic Strapping Machine Features:

- Equipped with all industry standard features
- Three Phase
- For 12 mm straps
- Roller-driven table
- Table height: 820 mm
- Standard conveyor speed: 30 meter/minute
- Multiple strap function for single, double, continuous strapping or transit mode
- Up and down stream interlock with complete plug connection
- Standard Arch, size 850x600mm.

## Options:

- Siemens PLC control
- Variable conveyor speed; from 18 meter/minute to 42 meter/minute
- Safety Guards
- Stainless steel frame SUS 304 (TP-601AS)
- Optional 9mm straps
- Wide range of arch sizes available

Arch Width / Height (mm)	850	1050	1250
400	Optional	Optional	Optional
600	Standard	Optional	Optional
800	Optional	Optional	Optional
1000	Optional	Optional	Optional

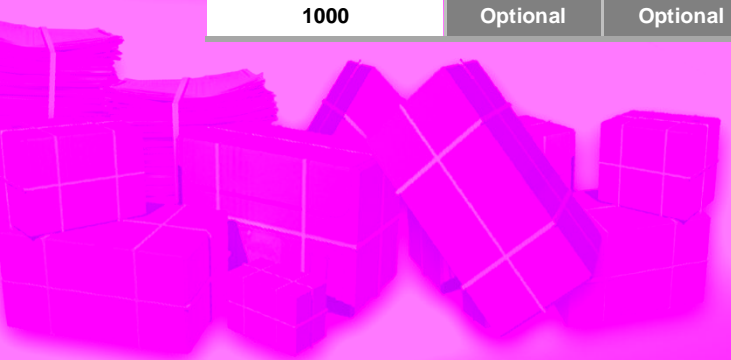

# Fully Automatic Strapping Machines

Fully Independent and Reliable Strapping Machines

Sal-Tech Easy Packaging provides standard strapping solutions and solves many strapping applications based on project design criteria and required functions. We offer a wide range of standard machines and options.



## Main Features



### Auto Strap Feeding

Simply insert the strap into the feeding rollers from the coil side of the machine and then push the "reset" button. The machine will automatically feed itself without the need to access to the inside of the machine. No need to remove it from the line for strap feeding. Easy strap loading.



### Auto Strap Ejector

Loop-eject clears unwanted strap automatically if the machine is accidentally activated without a package. Eliminates downtime.



### Electronic Tension Control

Strap tension can be adjusted accurately by the simple turn of a dial. Easy operation.



### Hinged Top Plates

Opens wide for quick cleaning, inspection, and maintenance of strapping head, strap-feed and tensioning unit.



### Belt Transmission

Instead of using roller chain, belt transmission system ensures long operational life and quiet operation.

## Technical Data

Strap Width	8 mm-12 mm
Strap Tension	7 kg-70 kg
Conveyor Speed	30 meter/Minute
Table Height	820 mm
Net Weight	330 kg
Electrical Requirements	Three Phase According to Local Standard



For more information visit us at [www.sal-tech.com](http://www.sal-tech.com)

Email us [support@sal-tech.com](mailto:support@sal-tech.com)